

DH-HCVR5108HSS3

8CH Tribrid 720P-Pro Compact 1U HDCVI DVR



Features


- > Support HDCVI/Analog/IP Video input
- > H.264+/H.264 dual-stream video compression
- > HCVR5108HSS3: All channel 720P realtime recording
- > HDMI/VGA simultaneous video output
- > 8 channel synchronous realtime playback, GRID interface & smart search
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- > ONVIF Version 2.4.1 conformance
- > Support 1 SATA HDD up to 6TB, 2 USB2.0(16CH 1 USB3.0)
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)
- > Advanced intelligent functions: Tripwire, Intrusion, Abandoned/Missing, Face Detection

Technical Specifications

Model		DH-HCVR5108HSS3
System		
Main Processor		Embedded processor
Operating System		Embedded LINUX
Video		
Input		8 channel, BNC
Standard	Analog	NTSC/PAL
	HDCVI	1080P/720P HDCVI Camera
	IP	8+4 up to 5Mp
Audio		
Input		1 channel, RCA
Output		1 channel, RCA
Two-way Talk		Reuse audio input/output channel 1
Display		
Interface		1 HDMI, 1 VGA
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768
Display Split		1/4/8/9
Privacy Masking		4 rectangular zones (each camera)
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording		
Video/Audio Compression		H.264/G.711
Resolution		1080P(1920×1080)/1080N(960×1080)/720P(1280×720)/960H(960×576/960×480)/D1(704×576/704×480)/HD1(352×576/352×480) /BCIF(704×288/704×240) CIF(352×288/352×240) / QCIF(176×144/176×120)
Record Rate	Main Stream:	1080P(1~15fps) 720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)
	Extra Stream	D1/CIF/QCIF(1~15fps)
Bit Rate		1~6144Kb/s
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection & Alarm		
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Intelligent Video (Optional)		Tripwire, Intrusion, Abandoned/Missing, Face Detection
Playback & Backup		
Sync Playback		1/4/9
Search Mode		Time/Date, MD & Exact search (accurate to second)
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next

	camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/Internal SATA burner/Network
Network	
Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	1 SATA port, up to 6TB
Auxiliary Interface	
USB Interface	2 ports(1 Rear), USB2.0
RS485 1 port, For PTZ	Control
General	
Power Supply	DC12V/2A
Power Consumption	10W(without HDD)
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa
Dimension(W×D×H)	Compact 1U, 260mm×220mm×40mm
Weight	0.75KG(without HDD)

System Connection

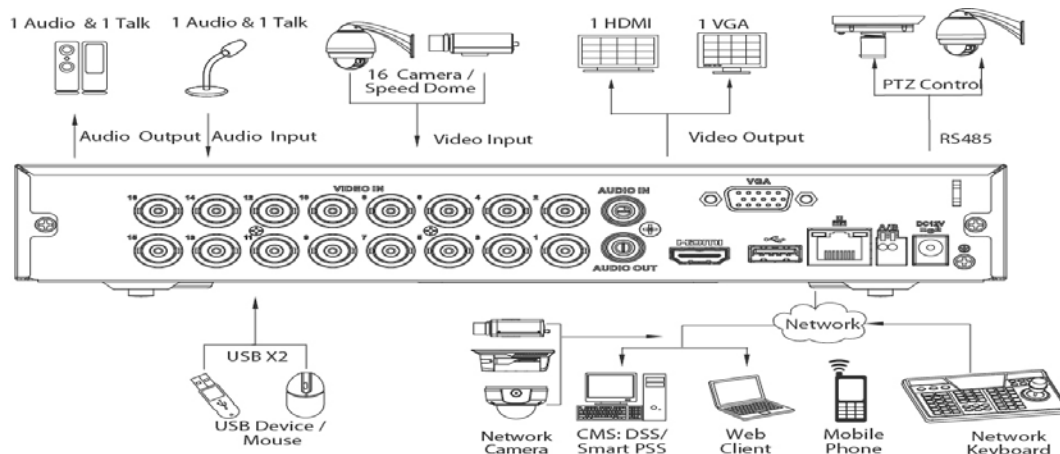

*Takes HCVR5108HSS3 as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China
 Tel: +86-571-87688883
 Fax: +86-571-87688815
 Email: overseas@dahuatech.com
 www.dahuatech.com

*Design and specifications are subject to change without notice.