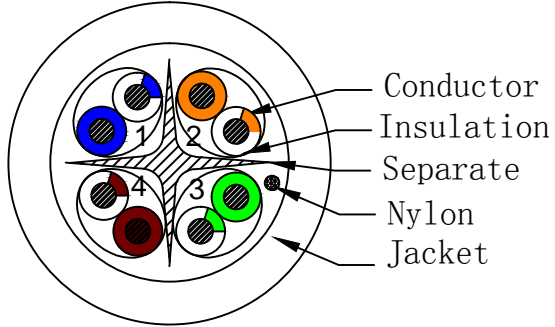


SPECIFICATION/规格书

CONSTRUCTION & DIMENSION/结构 & 尺寸			
Conductor/导体	Material/材质 : Bare copper Solid (裸铜线) Size/规格 : 4P Construction/结构: 1/0.56±0.008MM		
Insulation/绝缘	Material/材质 : HDPE Type: 1412 Avg. Thickness : 0.23MM Min. Thickness : 0.20MM Diameter/外径 : 1.02/1.0±0.03MM	CROSS-SECTION/截面图	
Inner Layer/芯线对绞	Direction/绞向 : S Pitch/绞距REF : 30mm underneath	ELECTRICAL PROPERTIES/电气特性	
Outside Layer/成缆	Direction/绞向 : S Pitch/绞距REF : 150mm underneath	Solid conductor resistance/单条导体电阻 : ≤8.0Ω/100M at 20℃	
Separate/隔离	Material/材质 : Polyethylene Construction/结构: 4.3×4.3×0.45mm	Insulation Resistance/绝缘电阻 : Min. 5000mega ohms-km at 20℃	
Shielding/屏蔽	Material/材质 : /	Dielectric Test/耐电压 : 1000V DC/1min; No Breakdown	
	Coverage/遮蔽率 : /	Delay skew/延迟差异 : ≤45nS	
	Drain Wire/地线 : /	Propagation speed/速率 : NVP 69%	
	Material/材质 : /	Frequency/频率 : 250Mhz	
Coverage/遮蔽率 : /	Impedance/阻抗 : 100Ω ±15		
		DESCRIPTION/说明	
		Rating Temperature/额定温度 : 75℃	
		Voltage Rating/额定电压 : 30V	
		Standard /标准 : TIA/EIA-568C.2	
		Tested/测试 : fluke test passed	
Filler/填充	Material/材质 : Nylon	Description: LAN CABLE CAT6 UTP 0.56BC 4P PVC Customer : _____ Drawing NO. : N1609220001 Drawing Owen 2016.09.22 UNIT:MM REV. :A PART NO. : _____ Checked _____ Approved _____	
Jacket/护套	Material : PVC		
	Avg. Thickness : 0.55MM		
	Min. Thickness : 0.48MM		
	Diameter : 6.1±0.30mm		
Color : Optional			
Marking/印字	Optional		
Packing/包装	305M/BOX		