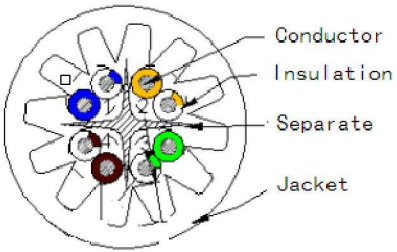


## SPECIFICATION/规格书

CONSTRUCTION & DIMENSION/结构 & 尺寸					
Conductor/导体	Material/材质 : Bare copper Solid (裸铜线) Size/规格 : 4P Construction/结构: 1/0.574±0.007MM				
Insulation/绝缘	Material/材质 : PE	CROSS-SECTION/截面图 ELECTRICAL PROPERTIES/电气特性			
	Avg. Thickness : 0.23MM				
	Min. Thickness : 0.21MM				
	Diameter/外径 : 1.05±0.15MM				
Inner Layer/芯线对绞	Direction/绞向 : S	Solid conductor resistance/单条导体电 : ≤7.08 Ω /100M at 20°C Insulation Resistance/绝缘电阻 : Min. 5000mega ohms-km at 20°C Dielectric Test/耐电压 : 1000V DC/1min; No Breakdown Delay skew/延迟差异 : ≤45nS Propagation speed/速率 : NVP 69% Frequency/频率 : 500Mhz Impedance/阻抗 : 100 Ω ±15			
	Pitch/绞距REF : 30mm underneath				
Outside Layer/成缆	Direction/绞向 : S	DESCRIPTION/说明 Rating Temperature/额定温度 : 75°C Voltage Rating/额定电压 : 30V Standard /标准 : TIA/EIA-568B.2 Tested/测试 : fluke test passed			
Pitch/绞距REF : 120mm underneath					
Separate/隔离	Material/材质 : Polyethylene	Description: LAN CABLE CAT6A UTP 0.574BC 4P PVC Customer : Drawing NO. : N1606290001			
	Construction/结构: 4.5×4.5×0.5mm				
Shielding/屏蔽	Material/材质 : /	PART NO. : Drawing : yang UNIT:MM REV. :A Checked : Approved :			
	Coverage/遮蔽率 : /				
	Drain Wire/地线 : /				
	Material/材质 : /				
Filler/填充	Material/材质 : Nylon				
	Construction/结构: 4.5×4.5×0.5mm				
Jacket/护套	Material : PVC				
	Avg. Thickness : 0.75MM				
	Min. Thickness : 0.60MM				
	Diameter : 7.6±0.15mm				
Marking/印字	Color : Optional				
	Optional				
Packing/包装	Optional				
	Optional				